




Baquda 40




- Low profile
- Modern design
- Three flash modes (also rotation mode)



Technical Specifications				
Mounting	Magnetic (max. 280 km/h)	Fixed- 1 screw	DIN	Motorcycle bracket
Dimensions	15,8 cm x 4,2 cm	15,8 cm x 6,6 cm	15,8 cm x 15,4 cm	15,8 cm x 59 cm - 84 cm (height adjustment)
Voltage	12-24 V			
Number of LEDs	12 x 3 W			
LEDs color				
Lenses color				
Power consumption	12 V - MAX 1,34 A DC 12 V - MAX 1,58 A		24 V - MAX 0,70 A DC 24 V - MAX 0,92 A	
Warranty	5 YEARS			
Approvals	E9 R65 TA1, TB1, TR1, TB2, TR2; E20 R10,AIRPORT ICAO Typ C, 10G			




*T - transparent (clear lens), *DC - Dual Color

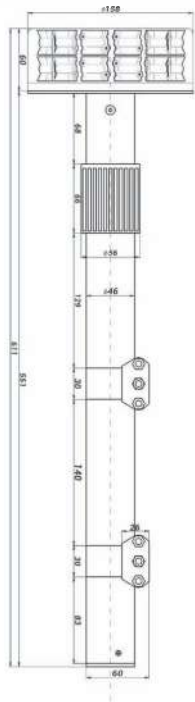

Baquda 2P

12/24V **5 YEARS WARRANTY** **E20 R10** **E9 R65**

- Excellent visibility
- Two flash modes (single, double)

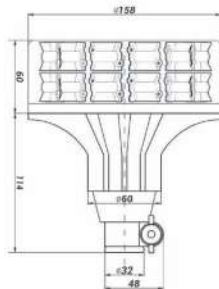

Technical Specifications				
Mounting	Magnetic (max. 280 km/h)	Fixed- 1 screw	DIN	Motorcycle bracket
Dimensions	15,8 cm x 6,2 cm	15,8 cm x 8,6 cm	15,8 cm x 17,4 cm	15,8 cm x 61 cm - 84 cm (height adjustment)
Voltage	12-24 V			
Number of LEDs	24 x 3 W			
LEDs color				
Lenses color				
Power consumption	12 V - MAX 2,43 A / 24 V - MAX 1,35 A			
Warranty	5 YEARS			
Approvals	E9 R65, TA2, TB2, TR2; E20 R10, 10G			

*T - transparent (clear lens)



Variants of mounting

Types of mounting for beacons: Led Spirit and Baquda



MAGNETIC MOUNT



FIXED- 1 SCREW



MOTORCYCLE BRACKET



DIN

VACUUM HOLDER



Rubber angular base (additional equipment)